




DRAWN CUP NEEDLE ROLLER BEARINGS

With closed end (Metric Dimensions)

BK Series

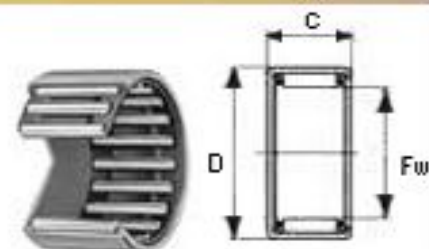

BK..OH

Dimension Table of BK Series : Table No 1

Designation	Weight (g)	Dimensions (mm)			Basic Dynamic Load Rating (kgf)	Basic Static Load Rating (kgf)
		Fw	D	C		
BK 0308 OH	1	3	6.5	6	123	84
BK 0408 OH	1.67	4	8	8	170	130
BK 0509 OH	2	5	9	9	190	160
BK 0609 OH	2.3	6	10	9	210	190
BK 0709 OH	2.7	7	11	9	250	250
BK 0810 OH	3.3	8	12	10	340	370
BK 0910 OH	3.6	9	13	10	360	410
BK 0912 OH	4.3	9	13	12	450	560
BK 1010 OH	4	10	14	10	390	480
BK 1012 OH	4.8	10	14	12	500	660
BK 1015 OH	5.9	10	14	15	650	920
BK 1210 OH	4.7	12	16	10	440	590
BK 1212 OH	9.4	12	18	12	650	760
BK 1312 OH	10.1	13	19	12	690	830
BK 1412 OH	10.8	14	20	12	720	900
BK 1416 OH	14.3	14	20	16	910	1220
BK 1512 OH	11.5	15	21	12	750	970
BK 1516 OH	15.2	15	21	16	950	1310
BK 1522 OH	20.5	15	21	22	1390	2130
BK 1612 OH	12.2	16	22	12	780	1040
BK 1616 OH	16.1	16	22	16	990	1400
BK 1622 OH	21.5	16	22	22	1440	2280
BK 1712 OH	13	17	23	12	810	1110
BK 1812 OH	13.7	18	24	12	840	1180
BK 1816 OH	17.9	18	24	16	1060	1590
BK 2012 OH	15.2	20	26	12	890	1320
BK 2016 OH	19.9	20	26	16	1130	1780
BK 2020 OH	24	20	26	20	1460	2520
BK 2030 OH	35	20	26	30	2270	4380
BK 2212 OH	18.1	22	28	12	940	1450
BK 2216 OH	24	22	28	16	1190	1960

Dimension Table of BK Series : Table No 2

Designation	Weight (g)	Dimensions (mm)			Basic Dynamic Load Rating (kgf)	Basic Static Load Rating (kgf)
		Fw	D	C		
BK 2220 OH	29	22	28	20	1560	2780
BK 2512 OH	23.5	25	32	12	960	1410
BK 2516 OH	29.5	25	32	16	1300	2090
BK 2520 OH	36	25	32	20	1720	2980
BK 2526 OH	45.5	25	32	26	2300	4330
BK 2538 OH	62	25	32	38	2950	5970
BK 2816 OH	33.5	28	35	16	1410	2390
BK 2820 OH	40.5	28	35	20	1860	3420
BK 3012 OH	29	30	37	12	1060	1700
BK 3016 OH	36	30	37	16	1430	2500
BK 3018 OH	40	30	37	18	1670	3040
BK 3020 OH	43.5	30	37	20	1890	3580
BK 3026 OH	54.5	30	37	26	2530	5190
BK 3038 OH	74.5	30	37	38	3250	7160
BK 3512 OH	34.5	35	42	12	1180	2050
BK 3516 OH	42.5	35	42	16	1600	3020
BK 3520 OH	51	35	42	20	2110	4320
BK 4012 OH	40	40	47	12	1260	2330
BK 4016 OH	49	40	47	16	1700	3440
BK 4020 OH	58.5	40	47	20	2250	4910
BK 4516 OH	56	45	52	16	1810	3660
BK 4520 OH	67	45	52	20	2390	5510
BK 5020 OH	84.5	50	58	20	2930	6540
BK 5025 OH	107	50	58	25	3760	9010