




DRAWN CUP NEEDLE ROLLER BEARINGS

Metric Dimensions

HK Series

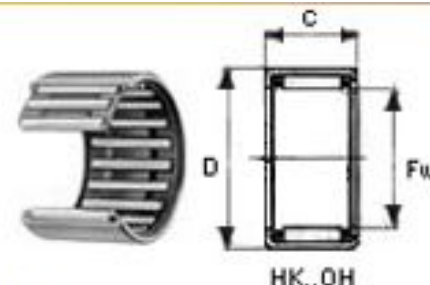

Dimension Table of HK Series : Table No. 1

Designation	Weight (g)	Dimensions (mm)			Basic Dynamic Load Rating (kgf)	Basic Static Load Rating (kgf)
		Fw	D	C		
HK 0308 OH	1	3	6.5	6	123	84
HK 0408 OH	1.54	4	8	8	170	130
HK 0509 OH	1.9	5	9	9	190	160
HK 0809 OH	2.2	6	10	9	210	190
HK 0709 OH	2.5	7	11	9	250	250
HK 0810 OH	3.1	8	12	10	340	370
HK 0910 OH	3.4	9	13	10	360	410
HK 0912 OH	4	9	13	12	450	560
HK 1010 OH	3.7	10	14	10	390	480
HK 1012 OH	4.4	10	14	12	500	660
HK 1015 OH	5.5	10	14	15	650	920
HK 1210 OH	4.3	12	16	10	440	590
HK 1212 OH	8.6	12	18	12	650	760
HK 1312 OH	9.2	13	19	12	690	830
HK 1412 OH	9.8	14	20	12	720	900
HK 1416 OH	13.2	14	20	16	910	1220
HK 1512 OH	10.4	15	21	12	750	970
HK 1516 OH	14	15	21	16	950	1310
HK 1522 OH	19.1	15	21	22	1390	2130
HK 1612 OH	10.9	16	22	12	780	1040
HK 1616 OH	14.8	16	22	16	990	1400
HK 1622 OH	20	16	22	22	1440	2280
HK 1712 OH	11.5	17	23	12	810	1110
HK 1812 OH	12	18	24	12	840	1180
HK 1816 OH	16.2	18	24	16	1060	1590
HK 2012 OH	13.2	20	26	12	890	1320
HK 2016 OH	17.8	20	26	16	1130	1780
HK 2020 OH	22	20	26	20	1480	2520
HK 2030 OH	33	20	26	30	2270	4380
HK 2212 OH	15.6	22	28	12	940	1450
HK 2216 OH	21.5	22	28	16	1190	1960

Dimension Table of HK Series : Table No. 2

Designation	Weight (g)	Dimensions (mm)			Basic Dynamic Load Rating (kgf)	Basic Static Load Rating (kgf)
		Fw	D	C		
HK 2220 OH	26.5	22	28	20	1560	2780
HK 2512 OH	19.7	25	32	12	960	1410
HK 2516 OH	26	25	32	16	1300	2090
HK 2520 OH	32	25	32	20	1720	2980
HK 2526 OH	41.5	25	32	26	2300	4330
HK 2538 OH	58.5	25	32	38	2950	5970
HK 2816 OH	28.5	28	35	16	1410	2390
HK 2820 OH	35.5	28	35	20	1860	3420
HK 3012 OH	23.5	30	37	12	1060	1700
HK 3016 OH	30.5	30	37	16	1430	2500
HK 3018 OH	34.5	30	37	18	1670	3040
HK 3020 OH	38	30	37	20	1890	3580
HK 3026 OH	49	30	37	26	2530	5190
HK 3038 OH	69	30	37	38	3250	7160
HK 3512 OH	27	35	42	12	1180	2050
HK 3516 OH	35	35	42	16	1600	3020
HK 3520 OH	43.5	35	42	20	2110	4320
HK 4012 OH	30	40	47	12	1260	2330
HK 4016 OH	39	40	47	16	1700	3440
HK 4020 OH	49	40	47	20	2250	4910
HK 4516 OH	43.5	45	52	16	1810	3860
HK 4520 OH	54.5	45	52	20	2390	5510
HK 5020 OH	69	50	58	20	2930	6540
HK 5025 OH	86	50	58	25	3760	9010
HK 5520 OH	75	55	63	20	3040	7070
HK 5528 OH	105	55	63	28	4400	10300
HK 6012 OH	49	60	68	12	1740	3200
HK 6020 OH	81	60	68	20	3350	7500
HK 6032 OH	136	60	68	32	5300	13500

